



FIMP-XL-E


INDUSTRIAL COMPACT SPLICEBOX AND PATCH PANEL

FIMP-XL-E is an intelligent system that consists of two housing shells and offers even more flexibility in your application.

It is based on FIMP-XL which is suitable for 24 fibers. The two housing shells are connected with an additional piece in the middle. Thus there is more space and splicing becomes very easy. Consequently, FIMP-XL-E is suitable for 48 fibers.

The robust and powder coated housing is suitable for DIN rail mount.

Regarding coupling and fiber types, we offer a great variety. Please use the adjacent table to choose the required type.

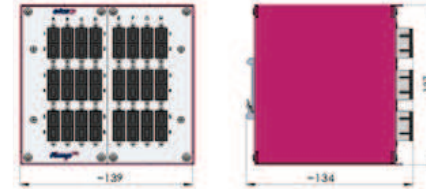

| Typ MM | 24xST Duplex 62MM | 24xSC Duplex 62MM | 12xLC Quattro 62MM | 24xST Duplex 50MM | 24xSC Duplex 50MM | 12xLC Quattro 50MM | 24xE2000 compact 62MM | 24xE2000 compact 50MM | |
|------------------------------|------------------------------------|---|------------------------------|-----------------------------|-----------------------------|----------------------------------|-----------------------------|-----------------------------|--|
| Art.-No. | 061802 2112221 129-00 | 061802 2312223 129-00 | 061802 2412224 129-00 | 061801 2112121 129-00 | 061801 2312223 129-00 | 061801 2412224 129-00 | 061802 2712227 129-00 | 061802 2712127 129-00 | |
| Typ SM | 24xST Duplex SM | 24xSC Duplex SM | 24xSC 8° APC Duplex SM | 12xLC Quattro SM | 24xE2000 compact SM | 24xE2000 compact 8° APC SM | | | |
| Art.-No. | 061803 6112361 129-00 | 061803 7012370 129-00 | 061803 9012390 129-00 | 061803 6412364 129-00 | 061802 6712367 129-00 | 061802 8712387 129-00 | | | |
| Weight | 1500g | | | | | | | | |
| Dimensions | H: 137 mm; W: 139 mm; D: 134 mm | | | | | | | | |
| Operating temperature | -40 °C – +75 °C | | | | | | | | |
| Humidity | 10% – 95% relative, non condensing | | | | | | | | |
| Housing | Stainless steel, powder coated | | | | | | | | |
| Accessories | Art.-No. | Description | | | | | | | |
| | 1060000001 | Cable gland M20 | | | | | | | |
| | 1060000002 | Nut M20 | | | | | | | |
| | 1060000013 | Strain relief | | | | | | | |
| | 1060000022 | Splice holder | | | | | | | |
| | 1060000023 | Splice protection | | | | | | | |
| | 1060000008 | Cable tie | | | | | | | |
| | 1060000009 | Countersunk screw M 2,5x6 | | | | | | | |
| | 1000000001 | Screws | | | | | | | |
| | 1000000002 | Dual Mount Kit | | | | | | | |
| | 1060000010 | Lens tapping screw for Front panelbefestigung, Philipps screw, 2,2 x 9,5 mm | | | | | | | |
| | 1060000006 | Cable gland M25 with nut | | | | | | | |