

# Quick Start Guide

28-Port L2 Gigabit Ethernet Switch

EC 8TX/20FX – Order no. 27 1000 901E

eks Engel FOS GmbH & Co. KG  
Schützenstraße 2-4

57482 Wenden-Hillmicke

Tel: +49 (0) 2762 9313-600

Internet: www.eks-engel.de



fiber optic systems

## 1. Unpack the Switch and Check Contents



Mounting Kit — 2 brackets and 4 screws



Four adhesive foot pads



Power cord




Console cable — RJ-45 to DB-9



Documentation—*Quick Start Guide* (this document) and *Safety and Regulatory Information*

## 2. Mount the Switch

### a. Mounting in a Rack

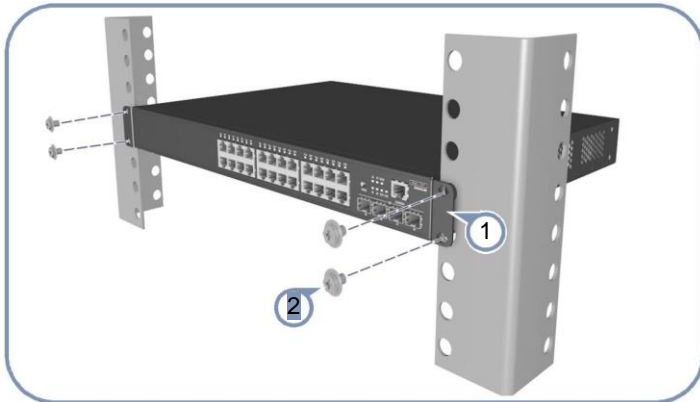

- 1 Attach the brackets to the front of the switch.
- 2 Use the screws and cage nuts supplied with the rack to secure the switch in the rack.




**Caution:** Installing the switch in a rack requires two people. One person should position the switch in the rack, while the other secures it using the rack screws.



**Note:** The switch can also be installed on a desktop or shelf using the included adhesive rubber foot pads.

### b. Mounting on a Wall

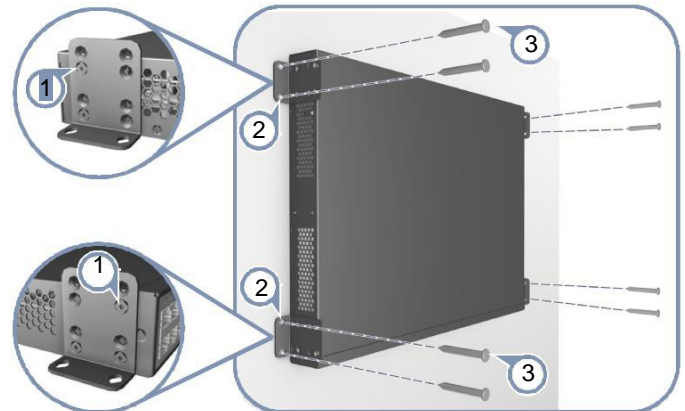

**Caution:** Wall mount the switch with the network ports facing down.

**Caution:** Wall mount the switch using four brackets (included) attached to the front and rear of the switch.



1 Rotate the brackets 90 degrees and attach them to the front and rear of the switch. Use three screws for the front brackets and two screws for the rear brackets.



2 In the required location, mark and drill eight holes in the wall for the wall anchors (not included).




**Note:** For a wood wall, drilling holes and using wall anchors is not required.



3 Mount the switch on the wall and secure it in place using eight #12 wood screws (not included).

### 3. Ground the Switch

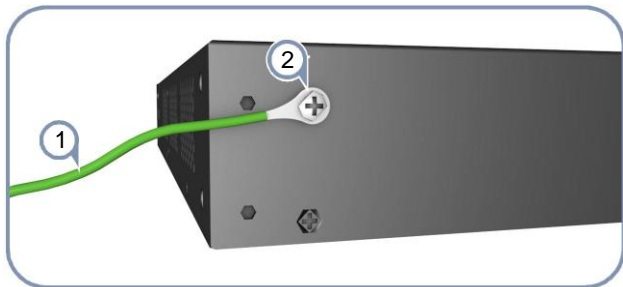


1. Ensure the rack on which the switch is to be mounted is properly grounded and in compliance with ETSI ETS 300 253. Verify that there is a good electrical connection to the grounding point on the rack (no paint or isolating surface treatment).
2. Attach an 18 AWG minimum grounding wire (not included) to the grounding point on the switch rear panel, and then to rack ground.



**Caution:** The earth connection must not be removed unless all supply connections have been disconnected.

### 4. Connect Power

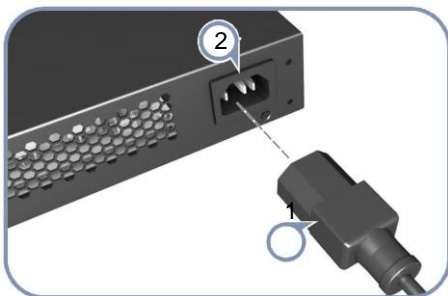

1. Plug the power cord into a 100-240 VAC, 50-60 Hz AC power source.
2. Insert the other end of the power cord directly into the AC input socket on the back of the switch.

1. The switch supports the option of connecting an external -48 to -60 VDC power source to its DC terminal block.
2. Connect the -48 VDC power feed wire to the DC plug “-” pin.
3. Connect the ground/return wire to the DC plug “+” pin.


### 4. Verify Switch Operation



Verify basic switch operation by checking the system LEDs. When operating normally, the following LEDs should be on (green):

PWR  
DIAG

### 5. Perform Initial Configuration

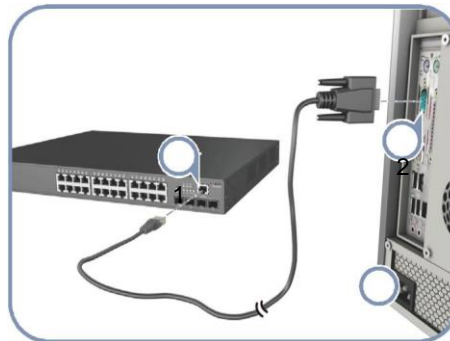


1. Connect a PC to the switch console port using the included console cable.
2. Configure the PC's serial port: 115200 bps, 8 characters, no parity, one stop bit, 8 data bits, and no flow control.
3. Log in to the CLI using default settings: Username “admin” and password “admin.”



**Note:** For further information on switch configuration, refer to the Web Management Guide and CLI Reference Guide.

## 7. Connect Network Cables

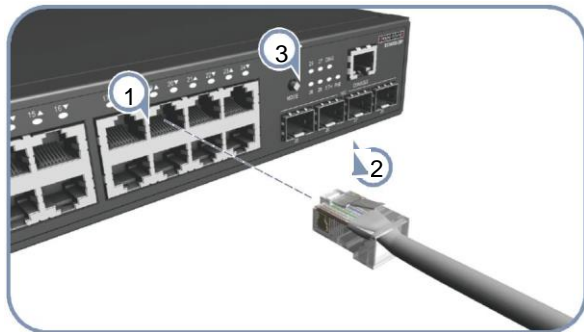

For RJ-45 ports, connect 100-ohm Category 5, 5e or better twisted-pair cable

For the SFP/SFP+ slots, first install SFP/SFP+ transceivers and then connect fiber optic cabling to the transceiver ports.

The following transceivers are supported:

- 10GBASE-CR
- 10GBASE-SR
- 1000BASE-SX
- 1000BASE-LX
- 1000BASE-T

As connections are made, check the port status LEDs to be sure the links are valid.

On/Blinking Green — Port has a valid link. Blinking indicates network activity.

## Hardware Specifications

Size (W x D x H)	44.0 x 22.0 x 4.4 cm (17.32 x 8.66 x 1.73 in)
Weight	2.82 kg (6.22 lb)
Temperature	Operating: -10°C to 65°C / 14°F to 149°F Storage: -40°C to 70°C / -40°F to 158°F
Humidity	Operating: 5% to 95% (non-condensing) 28T: 100-240 VAC, 50/60 Hz, 0.37-0.22 A 28P: 100-240 VAC, 50/60 Hz, 4.6-2.1 A
AC Input Power	28F/28F-I /28Fv2 : 100-240 VAC, 50/60 Hz 1 A 28Fv2-I : 100-240 VAC, 50/60 Hz 1.2 A 52T: 100-240 VAC, 50/60 Hz, 0.75-0.42 A
DC Input Power	28F: -48 – -60 VDC, 3.0 A 28T: 20 W
Max. Power Consumption	28P: 460 W 28F/28F-I /28Fv2/28Fv2-I : 60 W 52T: 60 W
PoE Power	28P: 370 W
Budget	
Regulatory Compliances	
Emissions	EN 55022:2010, Class A EN 55032:2012+AC:2013, Class A EN 61000-3-2:2014, Class A EN 61000-3-3:2013
Immunity	FCC Class A VCCI Class A CE Mark CCC GB 9254-2008 Class A EN 55024:2010
Safety	IEC 61000-4-2/3/4/5/6/8/11 UL (CSA 22.2 No 60950-1 & UL60950-1) CB (IEC 60950-1/EN 60950-1) CCC GB 4943.1-2011
Taiwan RoHS	CNS 15663